

# FINE FISSURED™ Second Look®

Scored Tegular  
medium texture

**GREENGUARD**  
Gold Certified  
(details below)

UP TO **56%** RECYCLED CONTENT


**LEED®**

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/extended producer resp.
- biobased materials
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

Calculate LEED contribution at [armstrongceilings.com/greengenie](http://armstrongceilings.com/greengenie)

LOCATION DEPENDENT

\$\$\$\$

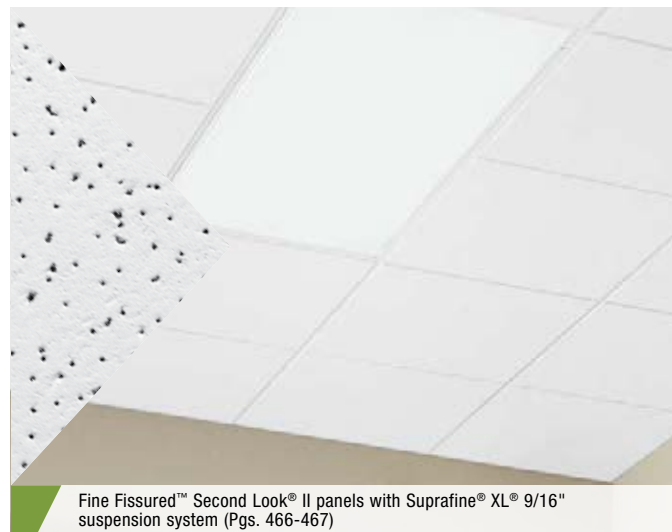

Fine Fissured™ Second Look® II panels with Suprafine® XL® 9/16" suspension system (Pgs. 466-467)


This panel offers economical, standard acoustics and scored visuals.

## KEY SELECTION ATTRIBUTES

- Geometric scored visuals
- Economical option to create a designer look
- 10-Year replacement panel available for items 1761




## FACE VIEW



Second Look I



Second Look II



Second Look III

## COLOR



White (WH)

## VISUAL SELECTION

## PERFORMANCE SELECTION

Dots represent high level of performance.

Edge Profile	Susp. Dwg. Pgs. 474-478 <a href="http://armstrongceilings.com/catdwgs">armstrongceilings.com/catdwgs</a>	Item No.	Dimensions (Inches)	UL Classified Acoustics	NRC + CAC	Total Acoustics <sup>1</sup>	Fire Performance	Light Reflect	Mold & Mildew Protection	Sag Resist	Certified Low VOC Emissions	Durability	Recycled Content	Recycle Program	30-yr Warranty
15/16" Angled Tegular	11	1760	24 x 48 x 3/4"	Second Look I	0.55	35	Class A	0.82	•	•	•	Std	Std	•	•
				Second Look II	0.55	35	Class A	0.82	•	•	•	Std	Std	•	•
				Second Look II	0.55	35	Fire Guard™	0.82	•	•	•	Std	Std	•	•
				Second Look III	0.50	35	Class A	0.82	•	•	•	Std	Std	•	•
9/16" Angled Tegular	27	1765	24 x 48 x 3/4"	Second Look I	0.55	30	Class A	0.82	•	•	•	Std	Std	•	•
				Second Look II	0.55	30	Class A	0.82	•	•	•	Std	Std	•	•

Edge Profile	Susp. Dwg. Pgs. 474-478 <a href="http://armstrongceilings.com/catdwgs">armstrongceilings.com/catdwgs</a>	Item No.	Dimensions (Inches)	UL Classified Acoustics	NRC + CAC	Total Acoustics <sup>1</sup>	Fire Performance	Light Reflect	Mold & Mildew Protection	Sag Resist	Certified Low VOC Emissions	Durability	Recycled Content	Recycle Program	30-yr Warranty
15/16" Angled Tegular	11	1760	24 x 48 x 3/4"	Second Look I	0.55	35	Class A	0.82	•	•	•	Std	Std	•	•
				Second Look II	0.55	35	Class A	0.82	•	•	•	Std	Std	•	•
				Second Look II	0.55	35	Fire Guard™	0.82	•	•	•	Std	Std	•	•
				Second Look III	0.50	35	Class A	0.82	•	•	•	Std	Std	•	•
9/16" Angled Tegular	27	1765	24 x 48 x 3/4"	Second Look I	0.55	30	Class A	0.82	•	•	•	Std	Std	•	•
				Second Look II	0.55	30	Class A	0.82	•	•	•	Std	Std	•	•

<sup>1</sup> Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product.

## SUSPENSION SYSTEMS



## PHYSICAL DATA

**Material**  
Wet-formed mineral fiber

**Surface Finish**  
Factory-applied latex paint

**Fire Performance**  
ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled). Fire Guard™: A fire-resistant ceiling when used in applicable UL assemblies (Class A).

**ASTM E1264 Classification**  
Type III, Form 2, Pattern C E K  
Fire Class A

**Humidity/Sag Resistance**  
HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

**VOC Emissions**  
**GREENGUARD Gold Certified**  
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

**Insulation Value**  
R Factor – 1.6 (BTU units)  
R Factor – 0.28 (Watts units)

**30-Year Performance Guarantee & Warranty**  
When installed with Armstrong® suspension system. Details at [armstrongceilings.com](http://armstrongceilings.com)

**Design Consideration**  
Do not mix Fine Fissured™ Second Look® panels with standard Fine Fissured panels in the same room.

**Weight; Square Feet/Carion**  
0.75 lbs/SF; 80 SF/ctn

**Minimum Order Quantity**  
1 cartion

**Metric Items Available**  
1761M - Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.

