


## ALU-VENT DOOR GRILLES

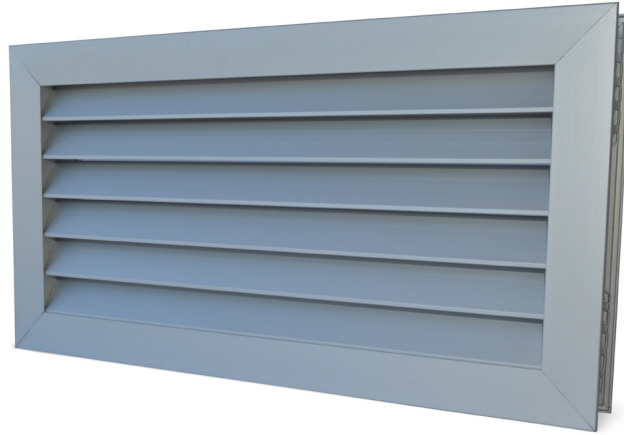

### DESCRIPTION


---

With a single set of angled fixed blades on both sides, Aluform's ALU-VENT door grilles provide easy relief for air flow and air conditioning whilst guaranteeing occupant privacy. Supplied as a fully assembled unit, these vents can be easily snapped together for quick installation and come with a complete telescopic back frame for an aesthetic appearance on both sides of the door, maintaining the maximum free area and keeping noise to a minimum.


### FEATURES

---


- + Suits door thicknesses from 30 - 45mm
- + Easy installation on site
- + Available in natural anodised and powdercoated finishes (lead time of 5 working days applies to powdercoated vents)
- + Stocked in natural anodised in a range of standard sizes:
  - V3015** - 300 x 150mm cut out size
  - V4515** - 450 x 150mm cut out size
  - V6015** - 600 x 150mm cut out size
  - V6020** - 600 x 200mm cut out size
  - V6025** - 600 x 250mm cut out size
  - V6030** - 600 x 300mm cut out size
  - V6045** - 600 x 450mm cut out size
  - V6060** - 600 x 600mm cut out size
- + For custom size ALU-VENTS, send us message at [sales@aluforminteriors.com.au](mailto:sales@aluforminteriors.com.au) or call us at **1800 995 817**  
(lead time of 10 working days applies to custom size vents)



## INSTALLATION INSTRUCTIONS

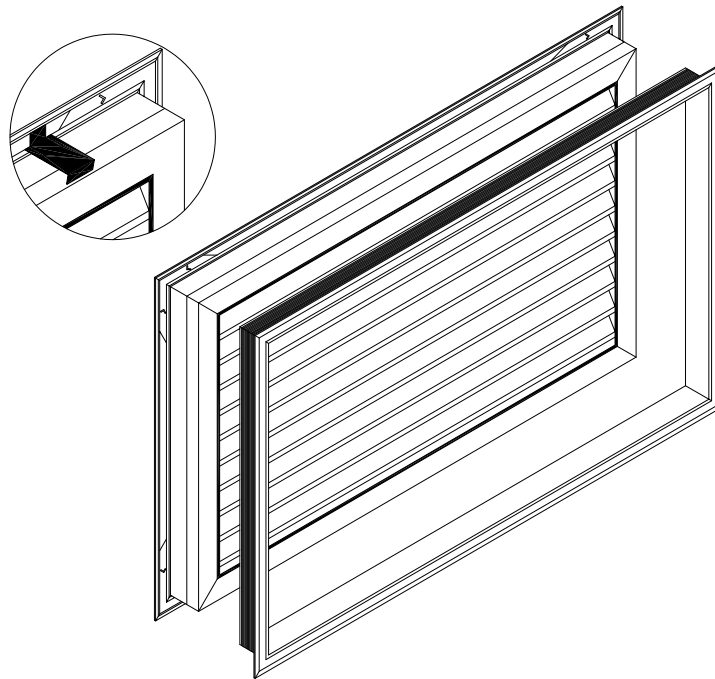


**Step 1**




Insert clip so that middle tab fits into upper groove and one side tab fits into lower groove.

**Step 2**

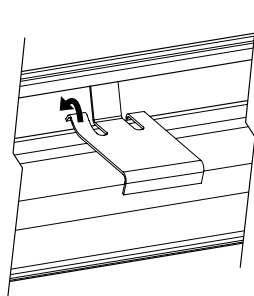


Pry second side tab into lower groove using screw driver.

**Step 3**

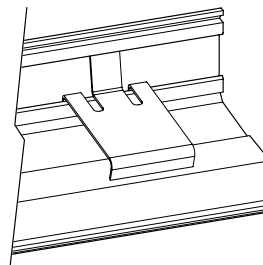

Ensure clip is installed correctly and repeat for all clips provided. Space clips proportionally on all four sides.

**Step 4**

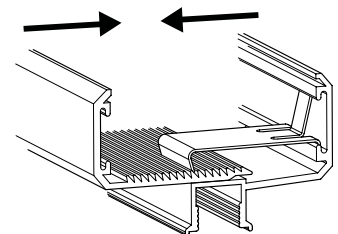

Place front frame into opening and press back frame into position from opposite side of the door, ensuring clips catch as shown.

## NOTE

Using silicon to seal the inside of flange will prevent movement within operating after installation.

Removing the ALU-VENT Door Grille after installation may result in damage to the clips and possibly the frame.