



INTERIOR ACOUSTICS

CUBE™

INSTALL INSTRUCTIONS

These installation instructions are of a general nature and designed to assist suitably experienced tradesmen install Autex Cube™ to a high standard in common wall and ceiling installations.

For installation support, contact your Autex Account Manager before you start.

MANUFACTURER'S DOCUMENTS

Autex recommends that all persons engaged in installing Cube™ have full knowledge of the product and installation procedure as set out in the most recent edition of the manufacturer's instructions and related documents.

Manufacturer's documents relating to work in this section are:

- Autex Cube™ Datasheet
- Autex Cube™ Manufacturers Guarantee
- Autex Cube™ Install Instructions

Copies of the above literature are available on request or from the Autex website.

DEVICES GENERATING HEAT

Localised high temperature conditions may be present in the following situations which may be detrimental to wall and ceiling linings:

Including, but not limited to:

- Radiant heaters
- Lighting
- Heat pumps
- Reverse cycle air conditioners
- Solid fuel stoves

For more information refer to the current documents below:

- NCC provisions for installation of heating appliances, fireplaces, chimneys and flues
- AS 2918 Domestic solid-fuel burning appliances — Installation
- AS 5601 Gas installations
- AS/NZS 3000:
- Unit manufacturer installation instructions

All appliances including lamps, luminaires and their associated ancillary gear should be installed so as not to cause the Cube™ surface temperature to rise above 80°C.

INSPECTION

Before starting installation of Autex Cube™ check again that the materials have been supplied as ordered and are free from damage or faults. Check colours and product labels to ensure product has been supplied correctly.

Where multiple sheets of Cube™ are required, it is important to check that all product is supplied from one batch. Due to batch to batch variations, we do not recommend joining different batch lots as this could result in colour variation. For best results, ensure Cube™ panels are applied with same side facing throughout the job. Look for the label '*This side to the wall*' for easier identification.

Any variations must be reported to Autex prior to commencing the installation. No claims will be accepted where the job continues with obvious faults and no consultation with Autex has taken place.

TRANSPORTATION, STORAGE & HANDLING

Cube™ must be transported, stored and handled with care. Cube™ should be kept dry and stored indoors. Avoid delamination or distortion and protect edges from being crushed.

Do not accept damaged product. If product arrives damaged note the condition on the freight documents and contact Autex immediately. Goods signed as received in 'good condition' will not be the responsibility of Autex.

Always transport and store Cube™ on a flat, clean and dry surface.

ON-SITE PANEL CARE

Cube™ panels are a semi rigid product that can be damaged if not handled with care. Avoid bending the packs and panels as this could cause creasing. Do not store or drop the panels



on their corners or edges as this will cause damage. Clean cloth gloves are ideal when handling Cube™ to avoid soiling.

RECOMMENDED ADHESIVE

Autex recommends a contact-type adhesive or full curing panel adhesive for applying Cube™ to most common substrates. Prior to commencing work we recommend contacting your local adhesive supplier with samples of the Autex products you are installing and the specification of the substrates you are installing to.

It is the installers responsibility to ensure that any adhesive is fit for intended purpose. It also is the installer's responsibility to ensure that the substrate is fit for the application of adhesives and Autex wallcoverings. For information regarding adhesive suppliers please contact your Autex Account Manager.

SUBSTRATE

Before work commences all joins, gaps and cracks in the wall/ceiling substrate must be taped with propriety sealing tapes to eliminate the ingress of dust and foreign particles travelling from the cavity into the installed product over time. Ensure that the substrates, backgrounds and adjoining surfaces will allow work to reach the required standard.

Autex recommends that the wall/ceiling surfaces be prepared to a minimum Level 3 finish.

Very porous surfaces may need to be sealed prior to applying the adhesive. Gloss and semi-gloss finishes should be lightly sanded and dusted clean prior to application of the adhesive.

All surfaces must be clean, dust-free and dry as dust and moisture will adversely affect the adhesive and may result in lack of adhesion.

INSTALL CUBE™ – GENERAL

Autex Cube™ should always be installed in accordance with these Installation Instructions and as per the specification detail and customer requirements. If there is conflicting information, you must seek clarification from all appropriate parties before proceeding with the work. It is imperative that the installation is planned before cutting and installing any product. Autex Cube™ panels are supplied at the dimensions stated on your local datasheet. We recommend working within dimensions that allow trimming to size.

We recommend you "measure twice and cut once".

Adhesives should be applied strictly in accordance with the adhesive manufacturer's instructions. Refer to the product label or the technical data sheet for spread rates, tack-off times, application methods and equipment required.

Adhesive spills or surface contamination should be cleaned immediately ensuring Fabric Care instructions on the Cube™ Datasheet are followed.

The job should be progressively checked for appearance, installation quality and adequate adhesion. Any variations in colour or appearance must be notified and discussed with your Autex Account Manager. No claims will be accepted where the job continues with obvious faults and no consultation with Autex has taken place.

INSTALL AUTEX CUBE™ – WALLS

Autex Cube™ should be installed to a clean, flat wall substrate that is prepared in accordance with the recommendations listed above.

For ease of installation we recommend that you install each Cube™ panel individually. This includes the application of adhesive and rolling the panel.

Apply the adhesive to the Cube™ panel and substrate as measured for the Cube™ panel, ensuring the adhesive manufacturers instructions are followed correctly. Extra adhesive can be applied to the wall along butt-joints to ensure adequate adhesion and a tight joint. Care should be taken not to apply excessive adhesive along joints as this can leak at the seams when pressure is applied.

Ensure the adhesive has tacked-off correctly then fit the Cube™ panel to the wall. Where joining Cube™ panels with a butt-joint it is recommended the panel is fitted firmly to the joint first, then smoothed out to the edges applying even pressure to ensure adequate adhesive transfer and a strong bond.

Finally roll the Cube™ panels towards the butt-joints, then roll the entire Cube™ panel to ensure adhesive transfer and a strong bond. Small wallpaper and vinyl rollers must not be used. A wide roller approximately 100-150mm is ideal.

Continue as above for all panels until complete.

INSTALL AUTEX CUBE™ – CEILINGS

Autex Cube™ can be installed to a flat ceiling substrate or direct fixed to battens.

When Autex Cube™ panels are installed overhead a combination of adhesive and mechanical fixings is recommended. Fixings must take into studs, battens or a solid substrate



a minimum 25mm and where there is no chance of threading or pulling out. These guidelines assume the use of screws.

Note: When mechanical fastenings/screws are not desired consultation with your adhesive supplier is recommended to ensure the panel will be permanently bonded to the substrate.

FIX TO CEILING SUBSTRATE

Autex Cube™ should be installed to a clean, flat ceiling substrate that is prepared in accordance with the recommendations listed above. For ease of installation we recommend that you install each Cube™ panel individually. This includes the application of a suitable high-quality adhesive (contact your local Autex Account Manager for suitable options), screw fixing and rolling the panel.

Apply the adhesive to Cube™ panel, and the substrate as measured for the Cube™ panel, ensuring the adhesive manufacturers instructions are followed correctly. We recommend the


Additional use of a suitable adhesive around the perimeter and through the length of the Cube™ panels at the nominated centers to help ensure a strong bond.

To ensure a tidy and flat installation additional battens may be required, refer to 'Fix to Ceiling Battens' section.

Care should be taken not to apply excessive adhesive along joins as this can leak at the seams when pressure is applied. Ensure the adhesive has tacked-off correctly then fit the Cube™ panel to the ceiling. When joining Cube™ panels with a butt-join it is recommended the panel is fitted firmly to the join first, then smoothed out to the edges applying even pressure to ensure adequate adhesive transfer and a strong bond.

Screw fixings are also recommended to secure the Cube™ panels to ceilings. Where combination of adhesive and screw fixings is being used screw fixings can be set at up to 600mm centres in all directions. Avoid over-tightening the screws as this may pinch the Cube™ material.

Finally roll the Cube™ panels towards the butt-joints, then roll the entire Cube™ panel to ensure adequate adhesive transfer and a strong bond.

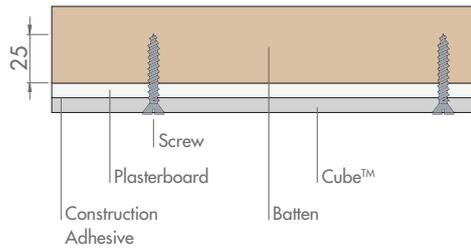

CUBE™ FIXED TO CEILING SUBSTRATE


Small wallpaper and vinyl rollers must not be used. A wide roller approximately 100-150mm is ideal. Continue as above for all panels until complete.

FIX TO CEILING BATTENS

To ensure a tidy and flat installation make sure the batten surfaces are flat and flush as Cube™ panels will show any undulation caused by mismatched joints or protruding fixings.



Battens should be 45mm minimum width and centres should be set at 400mm to reduce the potential of the Cube™ panels pillowing or sagging. A suitable adhesive must be applied along the length of the batten prior to screw fixing. Where panels butt allow a minimum 45mm fixing area for each edge of the Cube™ panel to ensure the edges can be securely fixed. This may require double-battening. The screw thread must take at least 25mm purchase into battens. Avoid over-tightening the screws as this may pinch the material.

Fixing position should be maximum 400mm centres around the perimeter and through each panel. We recommend fastening Cube™ panels from one side to the other to help avoid pillowing and sagging through the middle of the panel.

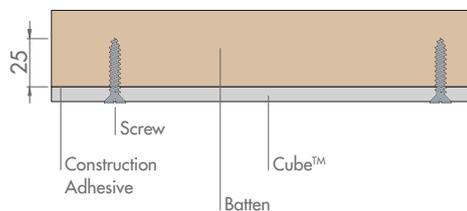

CUBE™ FIXED TO CEILING BATTENS



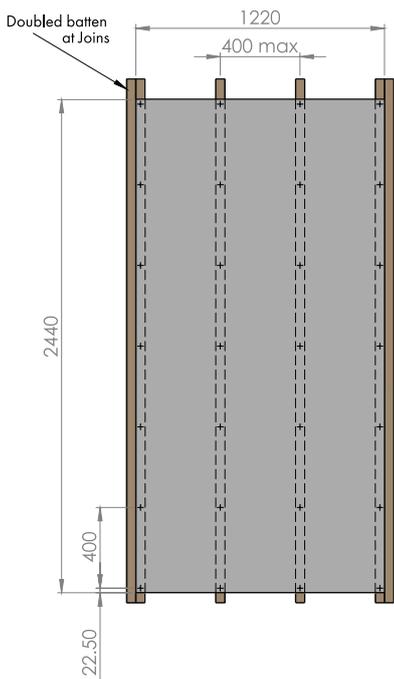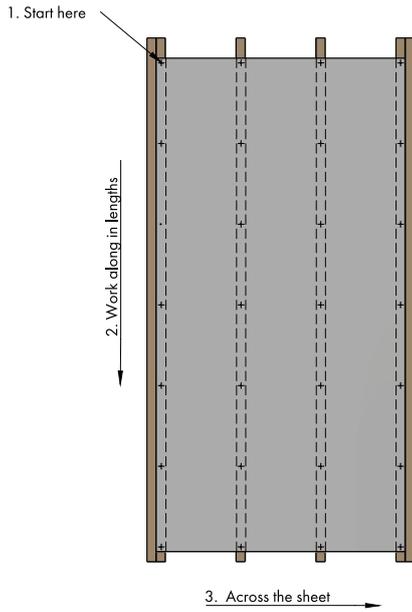

CUTTING CUBE

When cutting Autex Cube™ use a circular saw with a narrow blade with a minimum of 80 teeth. This will ensure a smooth cut.

Autex Industries Ltd
 702-718 Rosebank Rd
 Private Bag 19988
 Avondale 1746, Auckland
 New Zealand
 Freephone **0800 428 839**
 Phone **+64 9 828 9179**
 Fax **+64 9 828 5810**
www.autex.co.nz

Autex Pty Ltd
 166 Bamfield Road
 PO Box 5099
 West Heidelberg, Melbourne
 VIC 3081, Australia
 Freephone **1800 678 160**
 Phone **+61 3 9457 6700**
 Fax **+61 3 9457 1020**
www.autex.com.au

Autex Acoustics Ltd
 Unit 1 Alchemy Industrial Est.
 Platinum Court, Alchemy Way
 Liverpool, L33 7XN
 United Kingdom
 Phone **+44 151 294 3236**
 Fax **+44 151 546 0863**
www.autexacoustics.co.uk

Autex Acoustics LLC
 California
 USA
 Phone **+1 805 407 9256**
 Fax **+1 805 457 8932**
www.autexacoustics.com

You may want to duct tape the saw's shoe so that it doesn't scratch up the surface as you cut. Lay Cube™ face-side down and cut from the back to the front. Mark off the line you want to cut using masking tape. Alternatively you can use reverse toothed high carbon steel jigsaw blade with ground teeth which cuts down rather than up so top surface maintains its finish. This is also the best option for making curved cuts.

FIXTURES

Remove cover plates, light fittings and other fixtures as the work proceeds. Replace plumb, square and true to line as the work is completed.

Note: All electrical plumbing, fire safety appliances and fittings should only be removed and re installed by an appropriately qualified person.

PENETRATIONS

The fire and acoustic performance of walls and ceilings can be reduced by penetrations for plumbing, electrical switches, light fittings etc. For wall or ceilings that require a Fire resistance level (FRL) and or are acoustically sensitive, it is recommended that, wherever possible, such penetrations are avoided. Where penetrations are necessary only appropriately rated proprietary sealants and fittings should be used.

If unsure we recommend consultation appropriately qualified person is undertaken to ensure the buildings performance objectives are maintained.

REPLACE

Replace damaged or marked elements.

ON COMPLETION

Leave work secure, smooth and free of air bubbles, wrinkles, gaps, stains and blemishes and to the standard required by following procedures. Clean adjoining surfaces of any adhesive. Remove debris, unused materials and waste from site.

SERVICE

For more information contact your Autex Account Manager or visit our website.